BEST AVAILABLE COPY

AS-i Wizard New !

AS-i for opportunities in lowest levels of automation

- AS-i = Actuator Sensory-interface
- AS-i systems consist of a master(CP243-2) and slave nodes that transmit simple binary signals to the master
- A dominant competitor in binary networks is Allen-Bradley's DeviceNet

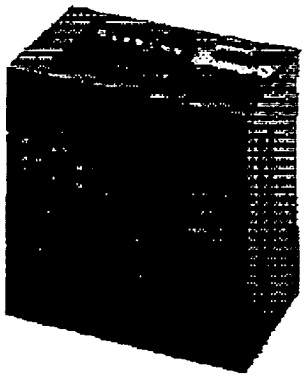

AS-i CP 243-2 (Master)



AS-i Slave

AS-i Network Cable

SIEMENS

AS-i Wizard New!

Minimum configuration of an AS-i Network:

- One Master (CP243-2)
- Power Supply
- Slave(s)

- One control module (master) in the AS-Interface network which polls the data of the other nodes (slaves) at precisely defined intervals.
- Simple two-wire cables without shielding or PE conductor are used to carry both data and the auxiliary power for the sensors simultaneously.

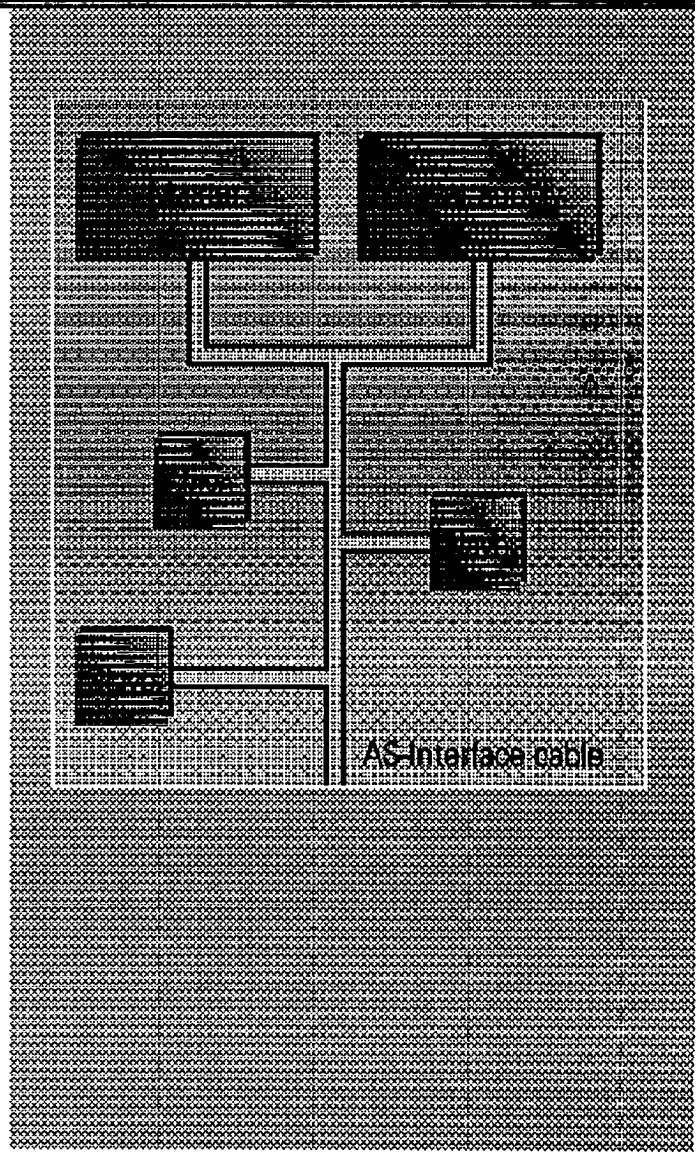

SIEMENS



AS-i Wizard

AS-i Wizard New!

Bus, Star, or Tree Network Configurations are possible

- The AS-Interface functions without any problem with standard components up to a length of 500 m – without repeaters or extenders up to 100 meters.
- Consult the AS-i documentation for additional details on network configurations, use of repeaters, etc.

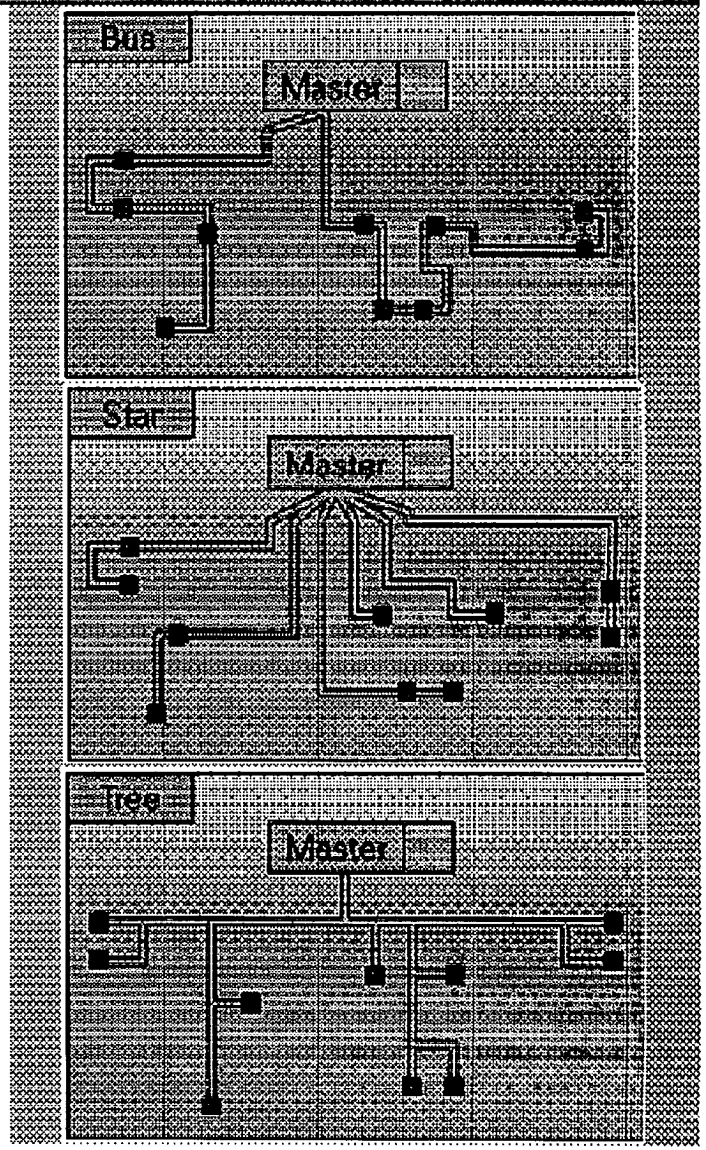

SIEMENS

AS-i Wizard New!

Without an AS-i wizard

- For S7-200 to work with AS-i, PLC programming for CP243-2 is required
- Programmer's logic must build and maintain an image register
- PLC logic to coordinate reads & writes from CP to PLC
- Tedious and error-prone
- Required to know PLC details and AS-i CP details

Advantages of AS-i wizard

- Wizard screens guide customer by asking for needed parameters
- When wizard finishes:
  - AS-i Sub-routine instructions are created based on wizard settings
  - AS-i Symbol tables are created
- Compares & updates configurations (online)
- Focus on utilizing the AS-i data, not debugging PLC logic
- Much easier - Reduces amount of programming complexity and time
- Reduces amount of technical expertise needed

SIEMENS

AS-i Wizard New !

AS-i Wizard

Configuring an AS-i Network

- Access the wizard by clicking 'Tools' on the navigation bar, then clicking the AS-i icon.
- Consistent with other Intelligent module wizards (Context-sensitive help, etc.)
- The AS-i wizard provides a way to easily set up data transfers between the S7-200 PLC and the AS-i CP243-2 module.
- The AS-i wizard *does not* provide or replace the normal AS-i master configuration.
- When Micro/WIN is connected to an **online** AS-i network, the wizard is able to read and compare slaves on the existing network.

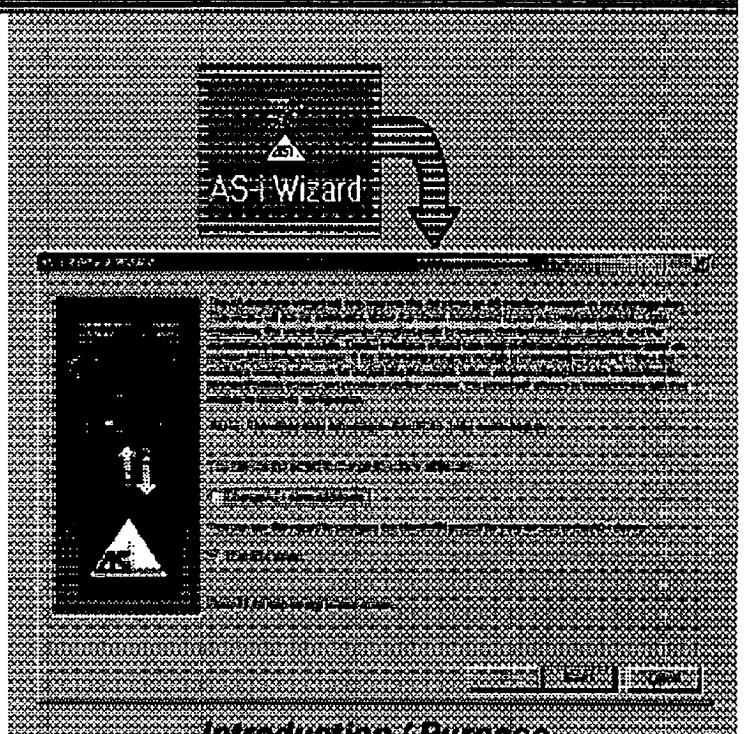

SIEMENS

AS-i Wizard

AS-i Wizard

AS-i Wizard Options

- The wizard introduction screen allows 2 options:
  - Change the address of a known **online** slave.
  - Map a AS-i network to the PLC

To change AS-i Slave address

- A screen is displayed to set up the changes:
- specify module position, current slave address, and new slave address
- Press the 'Change' button.
- After a slave address has been changed (after running the wizard and address is successfully changed),:then the CP243-2 reset button must be pressed (or else reset must be invoked with a hand-held programmer)

Option to change AS-i Slave Address

Screen to set up which AS-i slave address to change

SIEMENS

AS-i Wizard
AS-i Wizard
Module Position Assignment
Like all wizards, if Micro/WIN is connected to online PLC, the EM location can be found and displayed.
Re-reading the configuration
If an AS-i configuration already exists in your project, when you run the AS-i wizard again...then, on this screen:
The wizard detects existing configurations and asks whether you wish to modify an existing configuration or create a new configuration.
Options will also allow programmer to delete or move the existing configuration to a different module position.
SIEMENS
Module Position Assignment
Edit Existing Configuration: Move/Delete



AS-i Wizard

AS-i Wizard New!

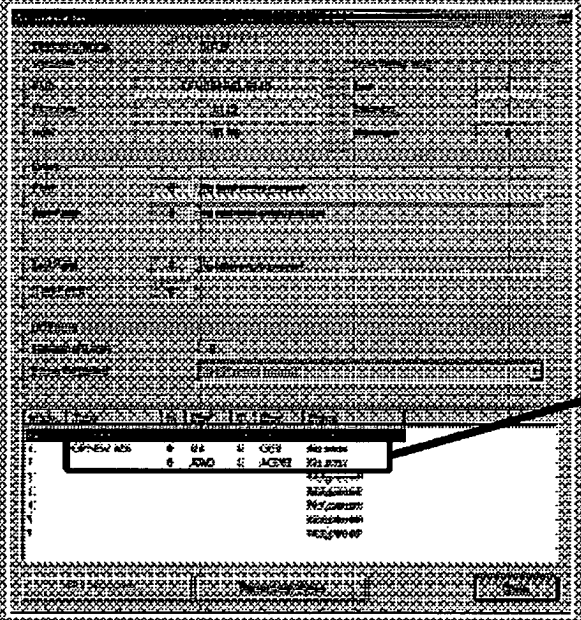

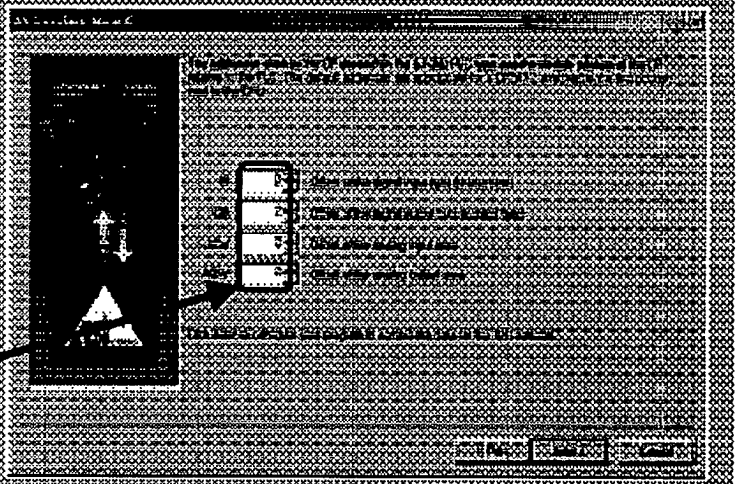

PLC Memory areas (offsets) to use

When PLC is attached to an online AS-i network, look in PLC Info dialog: The CP243-2 to PLC mapping is shown.

The wizard assists the programmer in setting correct CP offsets:

- Settings depend on: **(1)** CPU type and **(2)** AS-i CP module position.
- Offline configurations data can be optionally modified.
- Invalid configuration settings will trigger an error message from the wizard.
- For **online** EM configurations, offsets are automatically fixed and disabled (grayed out).

SIEMENS

AS-i Wizard New !

AS-i Wizard

Select type(s) of AS-I slaves to configure on your network

31 maximum slaves are allowed for:
- **Standard digital slaves**
- **Digital Slaves w/ Extended Addr. A**
- **Analog Slaves (Profile 7.3/7.4)**

These 3 slave types share the same 31 slave addresses. Therefore, **NO DUPLICATE** addresses are allowed among the 3 types.

31 maximum slaves are allowed for:
- **Digital Slaves w/ Extended Addr. B**

The Ext B slaves **CANNOT OVERLAP** any slave types **except with Digital Extended A type.**

The purpose of Extended slaves (A&B) is to allow a **maximum of 62 slave nodes** on one network.

Select the type of AS-i slaves on your network

- Different slave types have unique ID codes embedded in the data frames.
- Subsequent wizard screens depend on selections made on this screen.
- For **online** EM configurations, module types are automatically set, and the checkboxes are grayed out (disabled).

Overlapped AS-i slave addresses

- For instance, there cannot be a Standard Digital Slave #2 & Analog Slave #2.
- When a slave address is already used, then the slave address column is grayed out (unavailable) to slaves in other charts. -See the following slides.

SIEMENS



AS-i Wizard

AS-i Wizard NEW!

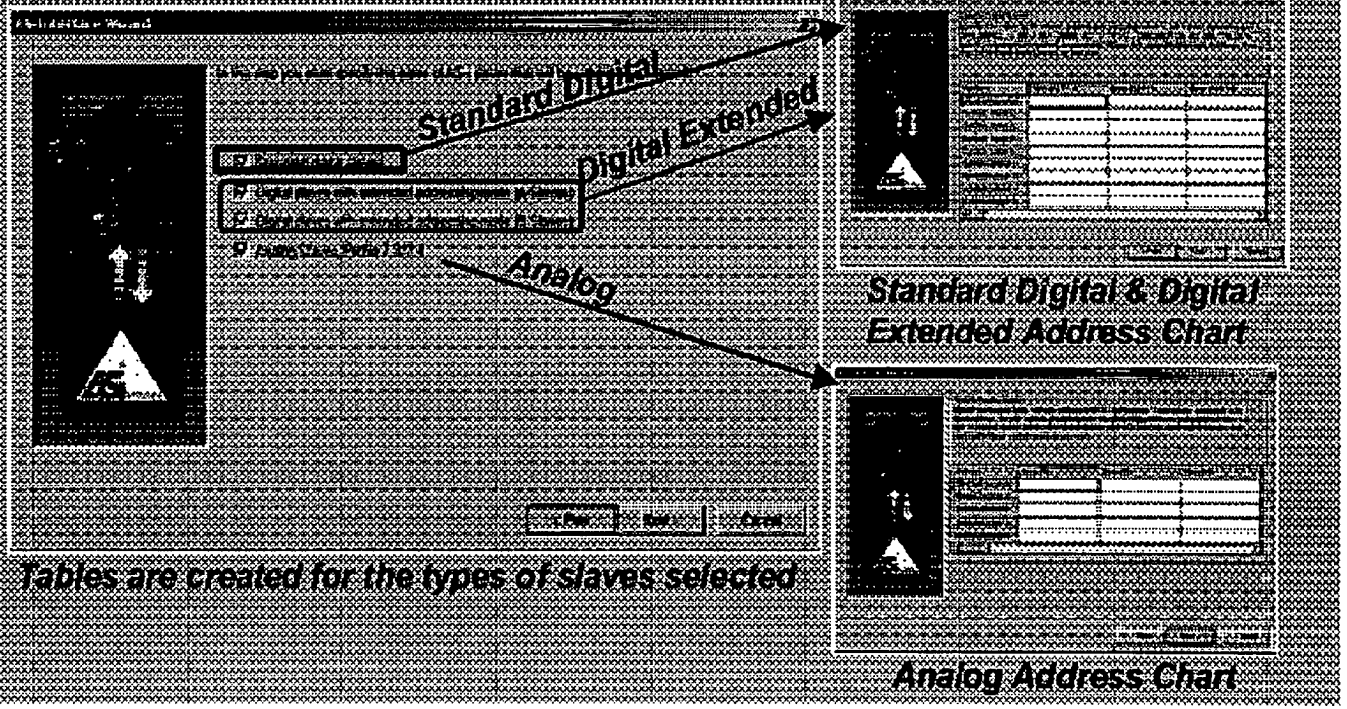

Organization of the AS-i slave types in the charts

- All of the selected digital slave types appear in one Digital chart.
- When **both** Standard Digital & Digital Ext.Address A types are selected, they both occupy the same chart columns. Example: **#1 / #1A**
- Digital Ext.Address B types follow any Standard Digital/Ext. A slaves in the digital chart. Example: **#1 - #31** followed by **#1B – #31B**

SIEMENS



AS-i Wizard

AS-i Wizard

1. Click top row for a drop-down list-box that allows you to select the slave's **I/O configuration.** Once selected, I/O's appear that match the selected configuration.

2. Symbols for individual slave I/O are assigned default symbols. You may modify the symbols in the chart.

Default Symbol Example: **DI01_2**
DI = Digital Input,
0 = Module Position (Slot) **0**,
1 = Slave Address **1**,
2 = Input **2**

3. **A scroll bar** is used to access all slave addresses

How a chart works.

Setting up the slave data in the chart(s)

- After finishing the wizard, the slave I/O symbols appear in a symbol table.
- These symbols are for later use in the PLC program logic.
- The symbol table is re-generated when the wizard is re-run (each time 'Finish' button is pressed) for the same AS-i CP243-2 network configuration.

SIEMENS

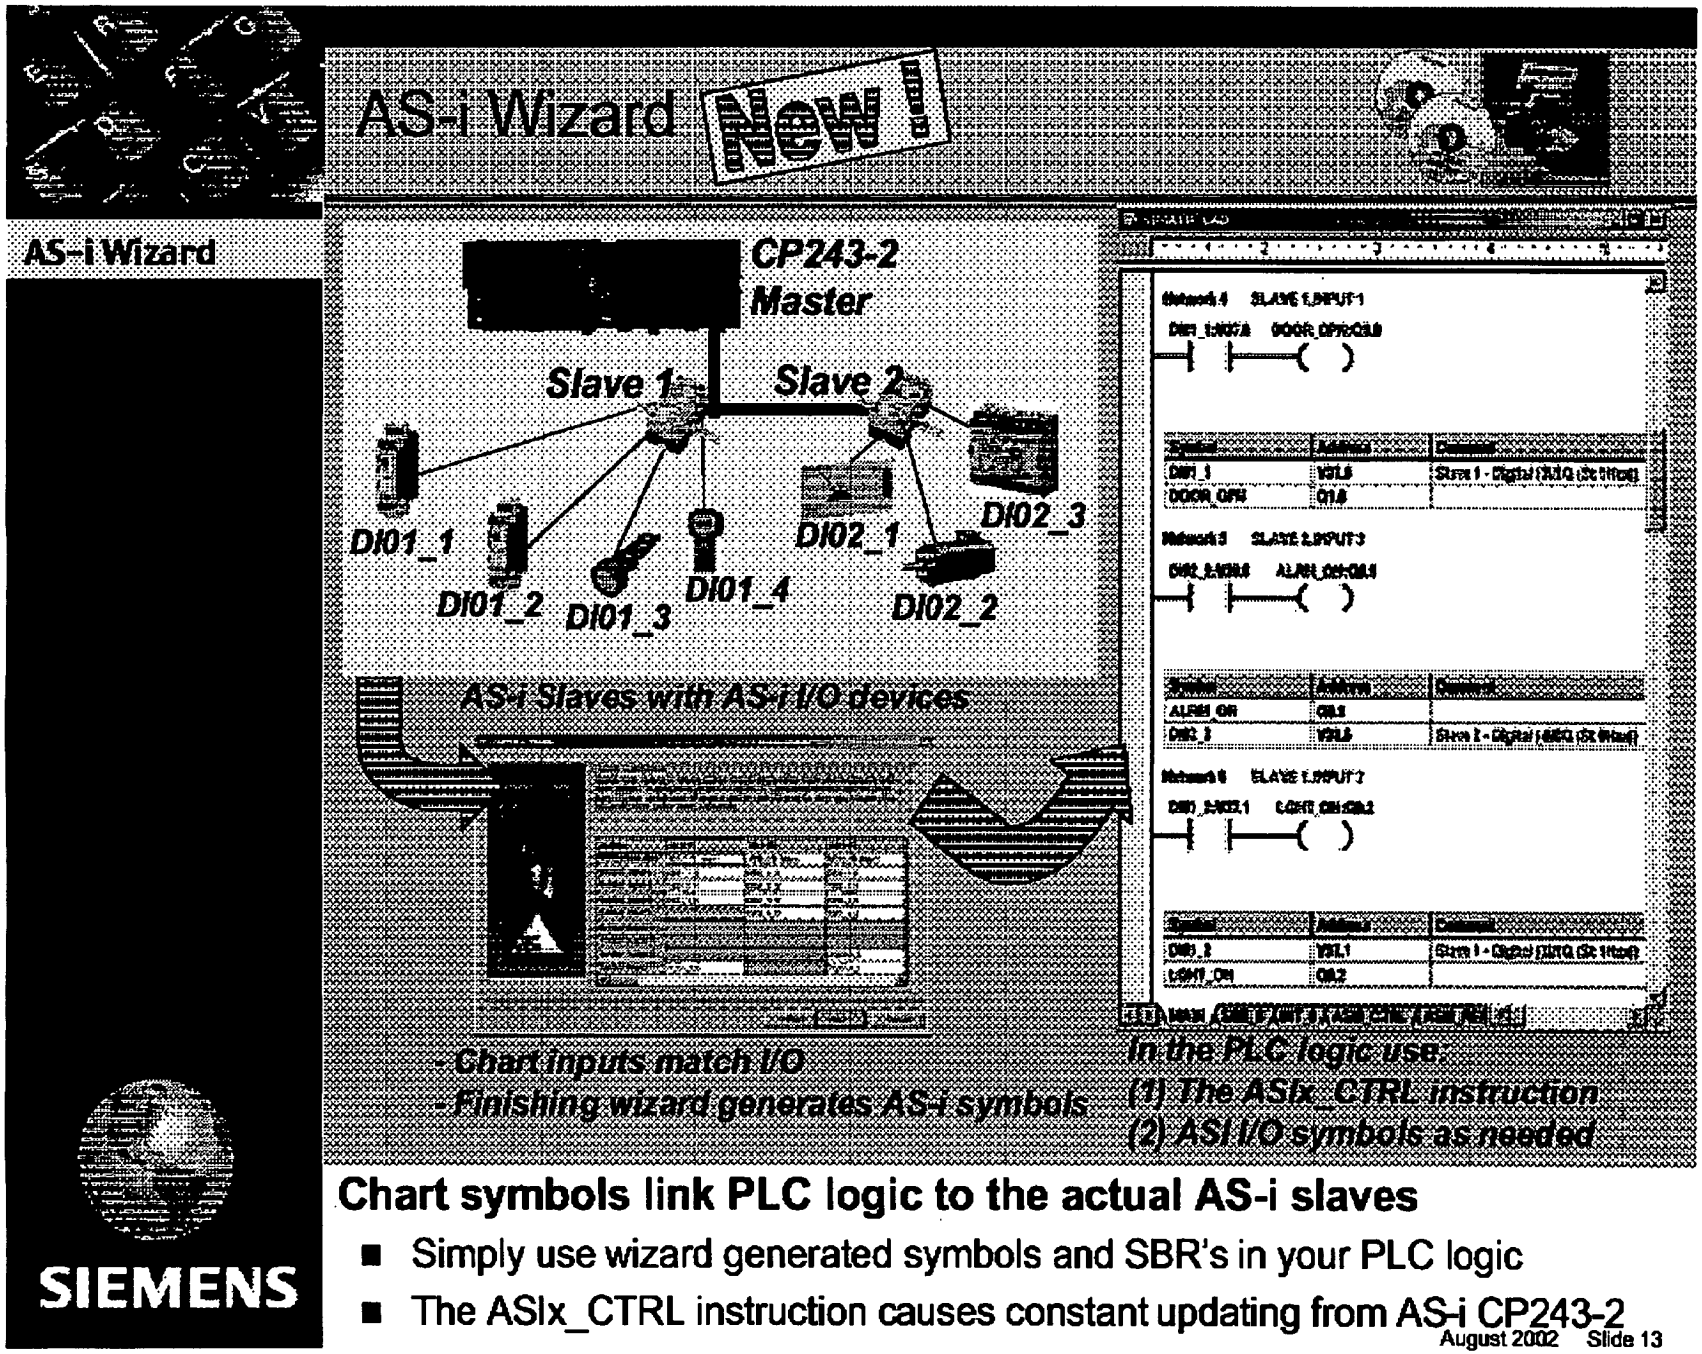

Chart symbols link PLC logic to the actual AS-i slaves

- Simply use wizard generated symbols and SBR's in your PLC logic
- The ASIx_CTRL instruction causes constant updating from AS-i CP243-2

AS-i Wizard New!

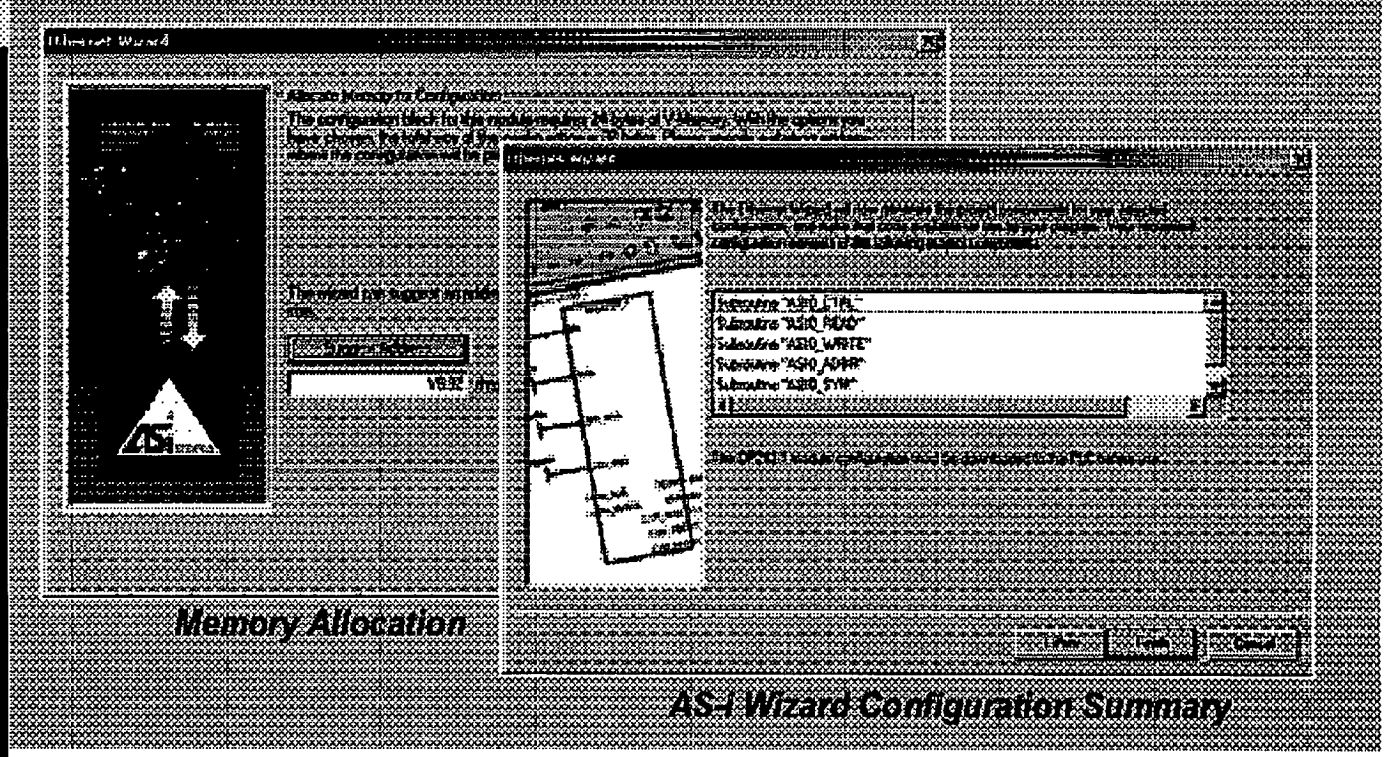

Final Wizard Screens

- Memory Allocation screen suggests available project space.
- The summary screen shows all project additions (SRB's, DB, Symbols).
- The summary screen gives advice about how to use the new additions.

SIEMENS

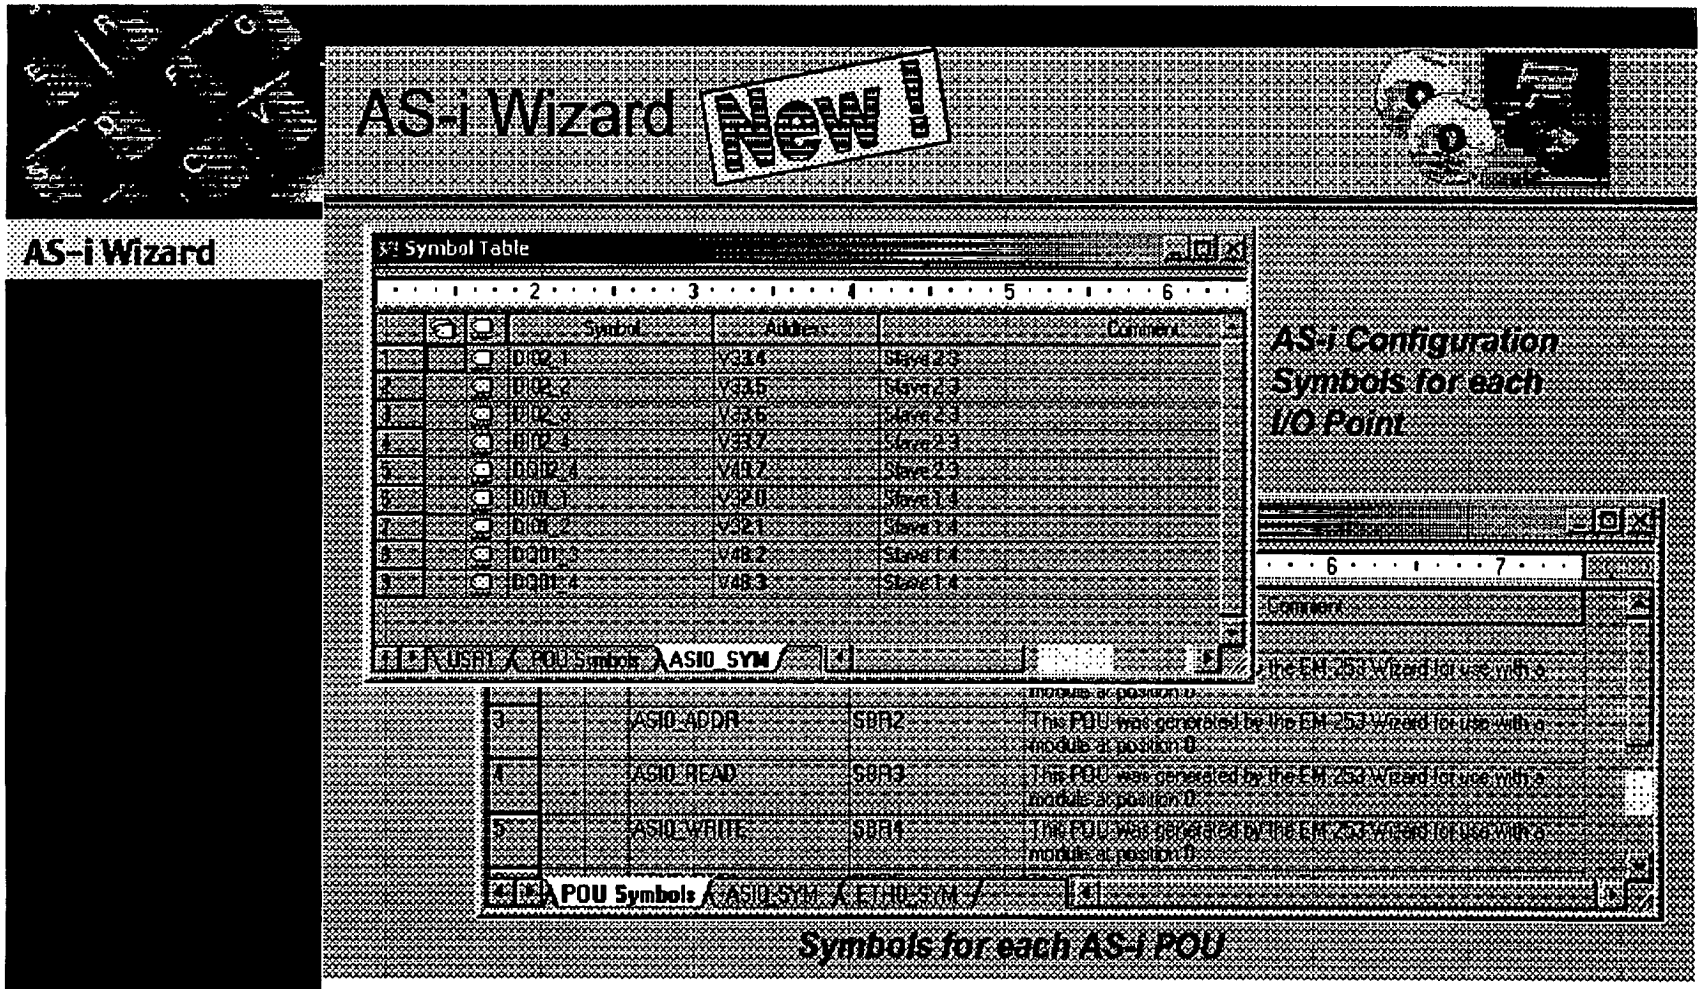

Project is Appended By the Wizard (when 'Finish' is pressed)

- Creates a symbol table of I/O points for all the configured AS-i slaves.
- Adds the new AS-i POU's (SBR's) to the System POU Symbol table
- Use symbols from the AS-i symbol table in creating the PLC program logic
- Using the wizard (re-running the entire wizard) to change an existing configuration causes the AS-i symbol table to be re-generated (overwritten).

AS-i Wizard New!

AS-i Wizard

Instructions Added to Tree

- New AS-i subroutines are added to the project's instruction tree
- **ASIx_CTRL** Instruction is used to copy slave data between the AS-i CP module and the PLC (*to be called every scan*).
- The read and write instructions are **for AS-i experts**: *they require you to know the bank number of the data**
- **ASIx_READ** Instruction is used to read bank data from the CP module (from CP to V memory).
- **ASIx_WRITE** Instruction is used to write bank data to the CP (from V memory to CP)

* Find details about AS-i in the CP243-2 AS-i manual.

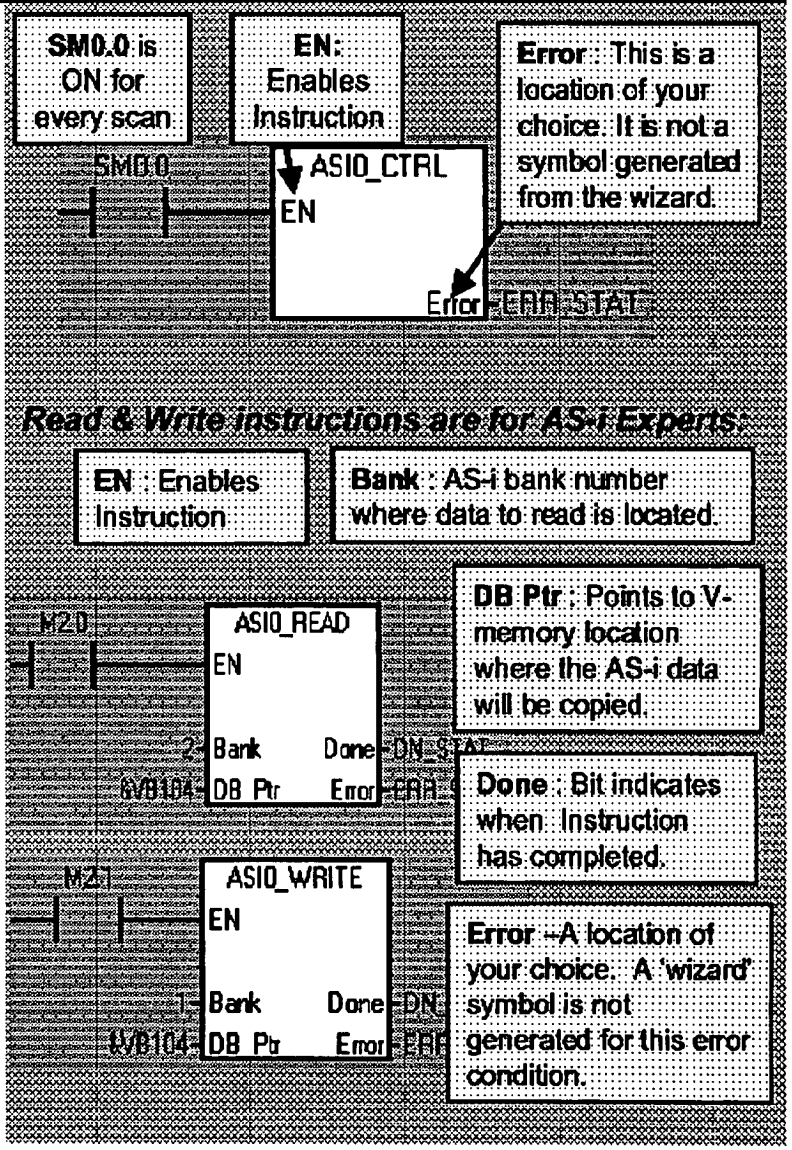

AS-i Wizard
AS-i Wizard
Compares the Offline& Online Configuration
Option to compare an online PLC configuration with the offline Micro/WIN wizard configuration
After comparing, the Micro/WIN configuration can be updated to match the online configuration
Selecting 'Update' will:
Add missing slaves to your configuration.
Replace (write over) any offline slaves that exist with the same address(es).
SIEMENS
Compares Offline to Online / Updates

AS-i Wizard New!

Without an AS-i wizard

- Configuring S7200-to-AS-i interfaces requires complex AS-i knowledge including program of the control/status bits, handling image registers, etc.

With an AS-i wizard

- Even beginning programmers can configure AS-i connections
- Reduces time for interfacing to an AS-i network setup
- Reduces time for modifying slaves (re-run wizard, online compare, change slave address)
- Wizard generated instructions and symbols are makes programming with the AS-i data very simple and straightforward

Summary

- Expands customers' usability with AS-i
- Increases S7-200 PLC capabilities in low-end a
- Allows opportunities in more application areas

SIEMENS

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☑ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.
As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.